

HD PRO SERIES

Series dedicated to the installer who's looking for a high-level camera making the difference in terms of image quality.



I4-350A-VF

40M IR 5MP PRO HD ANALOG VARI-FOCAL LENS BULLET CAMERA

Equipped with a 2.8-12mm varifocal lens, this 5MP bullet camera is designed for medium distance surveillance systems (up to 40m) for both indoor and outdoor scenarios.

Featuring 4in1 technology selectable by a protected DIPswitch. the camera is ideal for plug n play over existing analog infrastructure.



MAIN FEATURES



- 5MP
- Pro Series
- 2592x1944 Resolution
- 2.8-12mm Varifocal (84°-32°)
- 3D-DNR
- 4 in 1 (DIP Switch AHD/TVI/CVI/CVBS + PAL/NTSC)
- IP67
- COC support



SPECIFICATIONS

| | |
|------------------------|--|
| Image Sensor | 1/2.7" 5MP Sensor |
| Image Format | 5MP - 4:3. 4MP - 16:9 |
| Effective Pixels | 2608x1960 |
| Scanning System | Progressive |
| Resolution | 5MP: 2592x1944 AHD/TVI 4MP: 2560x1440 AHD/TVI/CVI CVBS: 700TVL |
| FPS | 25/30FPS |
| Min. Illumination | Color: 0.01lux @F1.2, AGC ON B/W: 0lux with IR |
| D&N | True Day&Night-ICR |
| IR LED | 2 LED Array (40m) |
| OSD Menu | Available via CoC Only |
| CoC Support | Yes |
| Day & Night Mode | Ext/Auto/Day/Night |
| Backlight Compensation | BLC |
| S/N Ratio | ≥52dB (AGC OFF) |
| White Balance | Auto / Auto->Set |
| Noise Reduction | 3D-DNR |
| Video Output | 5MP / 4MP (Selected by OSD Menu) AHD/TVI/CVI/CVBS + PAL/NTSC (Selected by DIP Switch) |
| Privacy Mask | No |
| D-Effect | Mirror + Flip |
| WDR | Digital |
| Lens (Field Of View) | 2.8-12mm Mega-Pixel Vari-Focal)84°-32°) |
| Power | DC12V/560mA |
| Operation Temperature | -30° ~ 50°, 10% ~ 90% humidity |
| Protection Rate | IP67 |
| Dimensions | 220.8*79.4*81.2mm |
| Net Weight | 700g |
| Junction Box | PR-JB12IP66 - PR-JB12IP64 |

DIMENSIONS

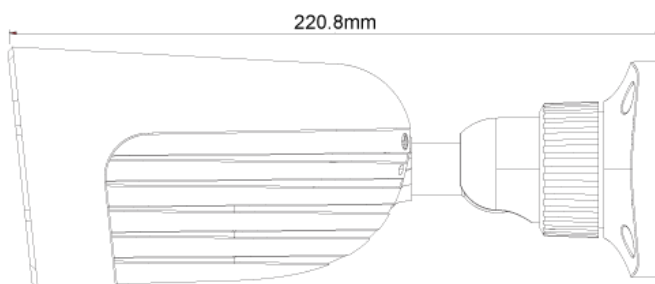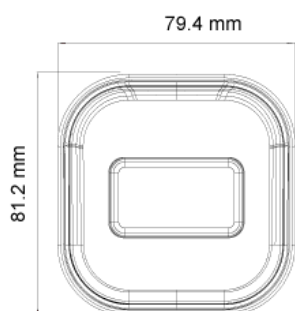

DIP Switch for Output Selection

ACCESSORIES



PR-JB12IP66
Small Water-proof Junction Box



PR-JB12IP64
Small Junction Box