

# User-friendly Professional LCD Touch Keyboard



## 5" TFT Touch LCD System Control Keyboard

# SPC-6000

The SPC-6000 is able to control up to 255 individual PTZ domes, DVRs and matrix switchers. It can be used in conjunction with up to 16 additional SPC-6000 units providing flexible expansion up to very large systems with user-friendly centralized control. The built-in 5" colour LCD touch panel provides an easy way to select camera locations and navigate control features such as video playback and preset positions, making it easy to manage a complete CCTV system. The 3D joystick and jog shuttle can be detached and placed on either the left or the right hand side of the controller making it suitable for left and right handed operation and it's ergonomic design makes it very comfortable for use over sustained periods.

- Built-in 5" colour TFT touch LCD screen
- Centralized control - up to 255 units with a single controller
- Flexible expansion to larger systems - up to 16 controllers
- 3D joystick to control PTZ functions
- Detachable joystick/jog shuttle for left/right handed use
- Multi-protocol support

## 5" TFT Touch LCD System Control Keyboard

# SPC-6000




### Specifications

SPC-6000	
<b>COMMUNICATION</b>	
Interface	RS-485/422 (Operating distance 1km), TTL (Matrix)
Data Port	8-pin RJ-45 connector (Female) (RS-485 serial port) BNC (Video input, Loop through), USB 2.0 (F/W updatable)
Baud Rate	2,400 ~ 38,400bps
Control Unit	255unit (PTZ / DVR / MATRIX / RECEIVER)
PTZ	SRD, SVR, SRP, Pelco-D/P, Panasonic, Vicon, AD, Honeywell, ELMO, Bosch, GE
DVR	Samsung-T/E
Protocol	Matrix SMX-25632
Receiver	Samsung-T
<b>OPERATIONAL</b>	
LCD Display	5" TFT touch LCD
Joystick	3 Axis twist zoom
Jog Shuttle	DVR playback control
On Screen Display	English, French, German, Spanish, Italian, Chinese, Russian, Polish, Czech, Romanian, Serbian, Swedish, Danish, Turkish, Portuguese
<b>ENVIRONMENTAL</b>	
Operating Temperature	0°C ~ 40°C
Operating Humidity	10 ~ 70% (Non-condensing)
<b>ELECTRICAL</b>	
Input Voltage / Current	12V DC / 4A
Power Consumption	Max. 4W
<b>MECHANICAL</b>	
Dimensions (WxHxD)	459 x 59 x 178mm (18.07" x 2.32" x 7")
Weight	1.5Kg (3.3 lb)

### Dimensions

Unit : mm (inch)

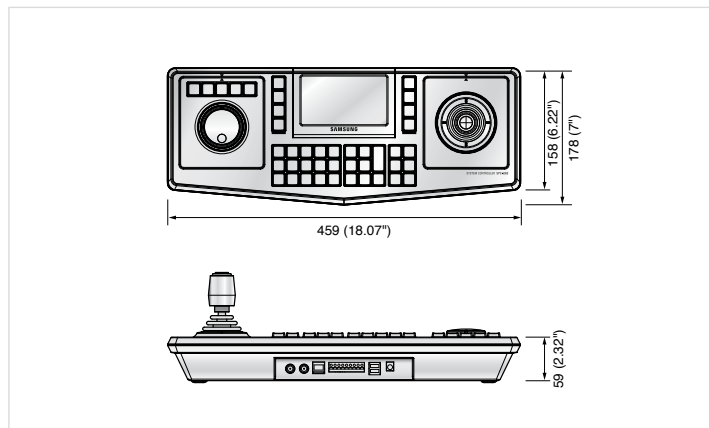

The Eco mark represents Samsung Techwin's will to create environment-friendly products and indicates that the product satisfies the EU RoHS Directive.

Design and specifications are subject to change without notice.



#### SAMSUNG TECHWIN CO., LTD.

701, Sampyeong-dong, Bundang-gu, Seongnam-si, Gyeonggi-do Korea 463-400  
Tel : +82-70-7147-8741~8749, 8752-8760 Fax : +82-31-8018-3745  
www.samsungsecurity.com www.samsungcctv.com

SAMSUNG TECHWIN AMERICA Inc.  
1480 Charles Willard St. Carson, CA 90746, UNITED STATES  
Tel Free : +1-877-213-1222 Fax : +1-310-632-2195  
www.samsungcctvusa.com

SAMSUNG TECHWIN EUROPE LTD.  
Samsung House, 1000 Hillswood Drive, Hillswood Business Park  
Chertsey, Surrey, UNITED KINGDOM KT16 0PS  
Tel : +44-1932-45-5300 Fax : +44-1932-45-5325

TIANJIN SAMSUNG TECHWIN OPTO-ELECTRONICS CO., LTD.  
No.11 Wei 6 Street, Micro-Electronic Industrial Park  
Jingang Road, Tianjin, P.R. CHINA 300385  
Tel : +86-22-23887788 Fax : +86-22-23887788

■ DISTRIBUTED BY

