

USB ALARM BOX

IO-1606



- 16 Alarm Inputs (Dry Contact)
- 6 Alarm Outputs (Dry Contact)
- USB Interface
- Power LED Indicator


Specifications

IO-1606		
Connectivity	Alarm Input	16 Dry Contacts
	Alarm Output	6 Dry Contacts
	Connection Interface	Micro USB
	Power Supply	5VDC/1A
	Power Consumption	<5W
Housing	Bracket	Wall Mount
	Dimensions	140mm×74mm×29mm
	Weight(gross)Work	180g
	Environment	-10°C~50°C, 10%~90% Humidity


Compatibility

DVRs	All DVRs with Ossia v1.3.4 and up
NVR5-4100X+(MM)	Supported from Production
NVR5-4100PX+(MM)	
NVR5-8200X+(MM)	
NVR5-8200PX+(MM)	
NVR8-16400PF(1.5U)	
NVR8-32800F-16P(2U)	
NVR8-32800F(2U)	Supported from v1.4.1 (Future Version)
NVR8-16400A(1U)	
NVR8-16400F(1U)	
NVR8-32800F(1U)	

*The Alarm interfaces will be automatically added to the Ossia interface

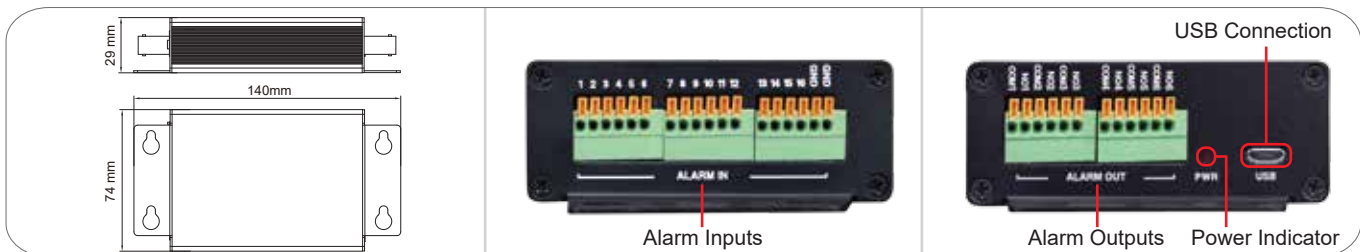

Without IO-1606

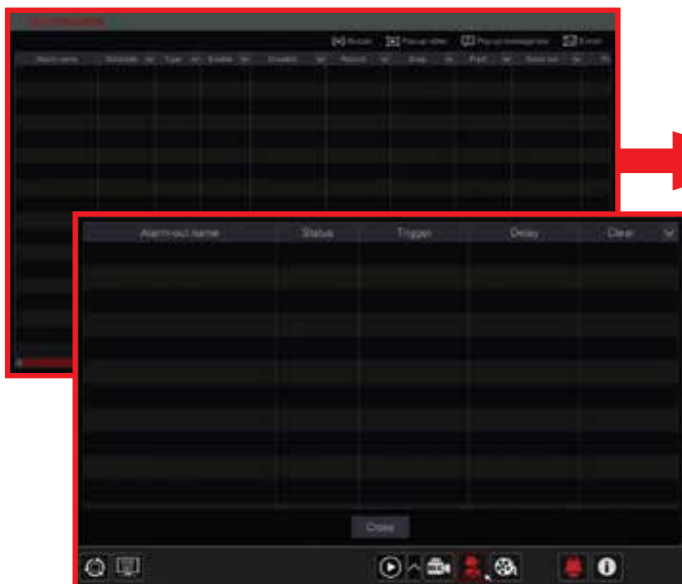

With IO-1606

