

# ND9426P

Core+ AI 16-Channel NVR with Embedded PoE

H.265/H.264 • 4K Display • 16 x PoE Port • RAID 0, 1 • Deep Search

## Technical Specifications

### Device

Model	ND9426P
Watchdog	Hardware + Software
Power Restoration	System Restart Automatically after Power Recovery
Reset Button	YES

### Display

LiveView Display	16 Channels Multi Layout Display: 1x1, 2x2, 3x3, 4x4, 1M+5, 1M+12, 1P+3, 1P+6, 2P+3, 3V
Video Output	HDMI x1, VGA x1
Display Resolution	3840x2160, 1920x1080, 1280x720 HDMI up to 3840 x2160, VGA up to 1920 x1080p
Fisheye Dewarp	Local: 1O, 1P, 1R, 1O3R, 1O8R, 1P3R Web: 1O, 1R, 1P
PTZ Operation	Direction Control, Home, Iris, Preset, Patrol (Group)


### Video

Video Format	MJPEG, H.264, H.265
Graphic Decoder	Hardware decoding
Decoding Resolution	Up to 7680x2560
Decoding Capability	H.265/H.264: 3840x2160 @ 120 fps (4-CH) 1920x1080 @ 480 fps (16-CH)

### Audio

Audio Format	G.711, G.726
Audio In/Out	3.5 Phone Jack Audio Output x1 3.5 Phone Jack Audio Input x1

### Record

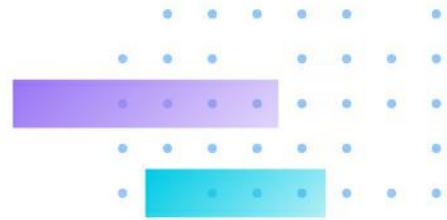

Recording Time (sec.)	Pre-Record: 5 (Max. 10) Post-Record: 20 (Max. 300)
-----------------------	---

Recording Throughput	192 Mbps
----------------------	----------

Recording Mode	Continuous, Schedule, Manual, Event
----------------	-------------------------------------

Recording Setting	Recycle (unit: Day)
-------------------	---------------------

## Storage & Backup

HDD Devices	Internal x2 (3.5")
-------------	--------------------

RAID	RAID 0,1
------	----------

Disk Management	Create, Format and Remove Disk HDD S.M.A.R.T
-----------------	---

External Storage	USB Storage (USB 3.0)
------------------	-----------------------

Video Clip Export	USB Dongle (FAT Format)
-------------------	-------------------------

Schedule Backup	FTP
-----------------	-----

## Playback

Playback Display	4 Channels Multi Layout Display
------------------	------------------------------------

Playback Control	Regular (Play, Pause, Stop), Rewind, Next / Previous Frame, Speed Control, Calendar, Event, Timeline, Timeline Scale, Thumbnail (Storyboard)
------------------	--

Video Search	By calendar, date/time, and alarm
--------------	-----------------------------------

Thumbnail Explorer (Storyboard)	Listing the thumbnail of recorded video (Max. 2 CH)
---------------------------------	---

Snapshot	JPEG
----------	------

Video Clip Export	Supported
-------------------	-----------

## Network

Ethernet	10/100/1000Mbps Ethernet (RJ-45) x2
----------	-------------------------------------

Network Throughput Input/Output Total	224Mbps
---------------------------------------	---------

PoE	802.3at/af compliant PoE ports x 16 (total Max. 200W)
-----	--

PoE Management	Supported
----------------	-----------

Protocols	IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, SMTP, FTP, DHCP, NTP, DNS, DDNS
-----------	---

## External Interface

USB	Front x1 (USB 3.0) Back x2 (USB 2.0)
-----	---

Alarm In	4
----------	---

Alarm Out	1
-----------	---

Audio	3.5 Phone Jack Audio Output x1 3.5 Phone Jack Audio Input x1 (reserved)
-------	--

## System

Camera Integration	ONVIF Profile S
--------------------	-----------------

Event	Motion Detection, Smart VCA Event, Cyber Attack, PIR Detection, Tampering Detection, Camera DI/DO, Camera Disconnected, Disk Failure, Disk Full, NVR DI/DO, PoE error
-------	---

Event Action	Video recording, email with snapshot, buzzer, PTZ, FTP, DO (camera, system), full screen, send to CMS, VIVOCLOUD APP Notification
--------------	---

User Management	User level: administrator, regular user
-----------------	---

Log	System, Recording, User, Error
-----	--------------------------------

Date & Time	Time Zone, Manual, Automatic Sync NTP, Daylight Saving Time
-------------	---

Language	Czech, English, French, German, Italian, Japanese, Korean, Portuguese, Polish, Russian, Spanish, Simplified Chinese, Traditional Chinese, Arabic
----------	--

## Deep Search

Object Search	People, Vehicle
---------------	-----------------

Scene Search	Line crossing, Intrusion, Loitering
--------------	-------------------------------------

Attribute Search	People: Gender, Age, Clothing Color, Accessories Vehicles: Type, Color
------------------	---



---

### Advanced Features

VCA Counting Solution	Supported
VCA Event Search	Supported
Smart Search II	Supported
Trend Micro IoT Security	Supported
Cybersecurity Management	Supported

### Remote Client

Software AP	Shepherd, VSS (VAST Security Station)
Mobile/Tablet App	iViewer (Android & iOS)
Web Browser	Chrome
VIVOCLOUD	Supported

### General

Power Input	100-240V AC, 50/60Hz
Power Consumption	Max. 270 W
Dimensions	365 (W) x 315 (D) x 44 (H) mm
Weight	2.78 kg
Operating Temperature	-10°C ~ 55°C (14°F ~ 131°F)
Humidity	0 ~ 95%
Safety Certifications	CE, FCC, VCCI, C-Tick, UL, CB, BSMI, BIS
Warranty	36 months