
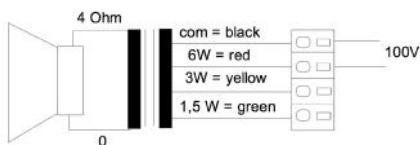
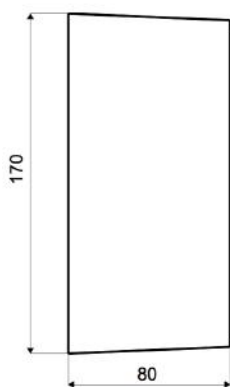


WLA-230G/EN5424

EN 54-24 Wall / On-Ceiling - Speaker
in ABS with 6 Watt Power

EN
54-24

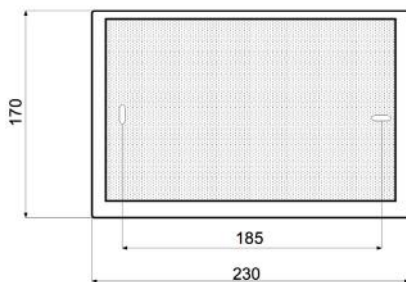

TECHNICAL DATA

WLA-230G/EN5424





Loudspeaker:	120mm - broadband
Power-Consumption:	100V-6-3-1,5W
Frequency-Range:	80-15 000 Hz
EN-Sensitivity 1W/4M:	78 dB
SPL max 6W/4M:	86,4 dB
SPL 1W/1M max. EASE/Ulysses:	97 dB (1,5 kHz)
SPL 6W/1M max. EASE/Ulysses:	105 dB (1,5 kHz)
Radiation H (0,5/1/2/4kHz):	180°/170°/100°/90°
Radiation V (0,5/1/2/4kHz):	180°/170°/100°/90°
Dimension:	230 x 170 x 80 mm
Weight:	1,2 kg
Material:	ABS
Color:	black
Certificate-Nr.:	1293-CPD-0166
Order-Nr.:	WLA-230G/EN5424-BK

- Easy mounting through Quick-Snap-Rear-Panel
- Only two drilling-points for the whole loudspeaker
- Flame retardent material acc. to EN 60695-11-20, 5VB
- Custom colors optional
- Wetroom-version with ALU-grill and impregnation obtainable
- Three touch-secure 100V-tappings
- Ceramic clamp & thermal fuse by request

WLA-230G/EN5424

EN 54-24 Wall / On-Ceiling - Speaker
in ABS with 6 Watt Power

Radiation

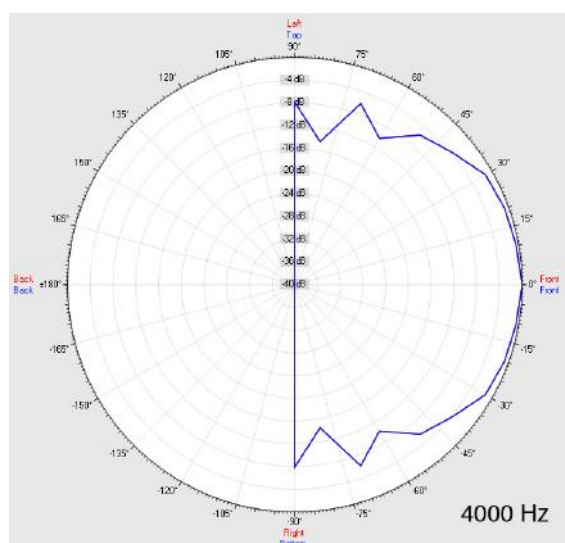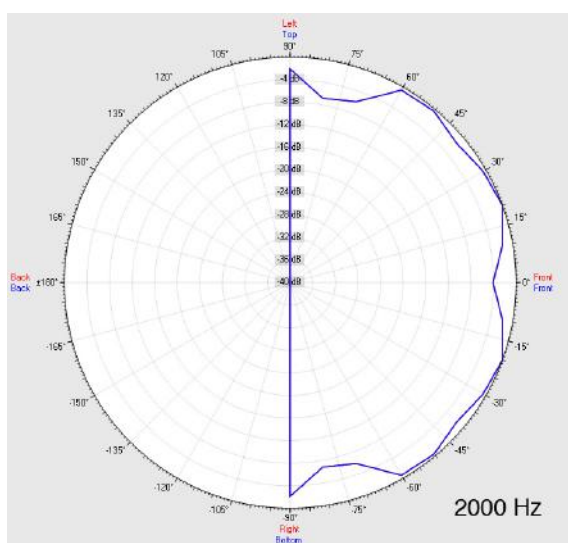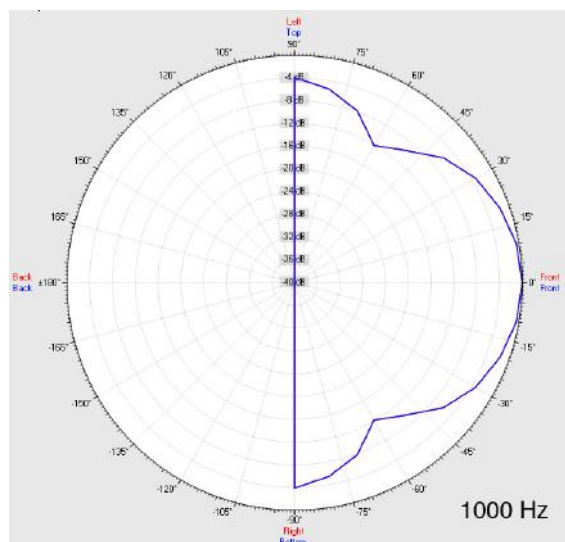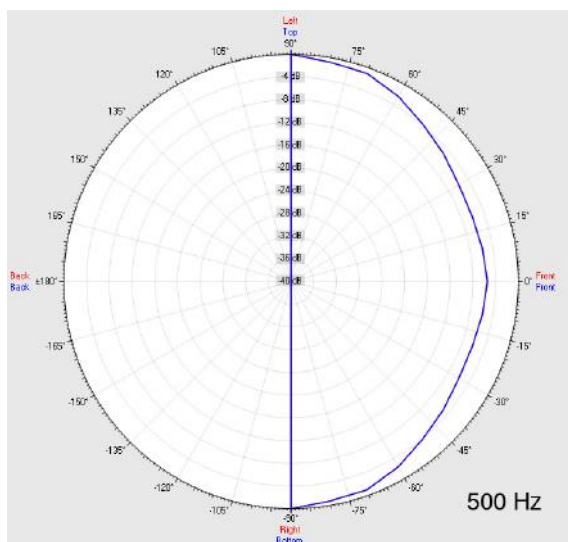


Test method	Axis	500 Hz	1000 Hz	2000 Hz	4000 Hz
EN 54-24	HOR	180°	170°	100°	90°
EN 54-24	VER	180°	170°	100°	90°
EASE/Ulysses	HOR	180°	80°	100°	100°
EASE/Ulysses	VER	180°	80°	100°	100°

WLA-230G/EN5424

EN 54-24 Wall / On-Ceiling - Speaker
in ABS with 6 Watt Power

Isobar-Diagramm

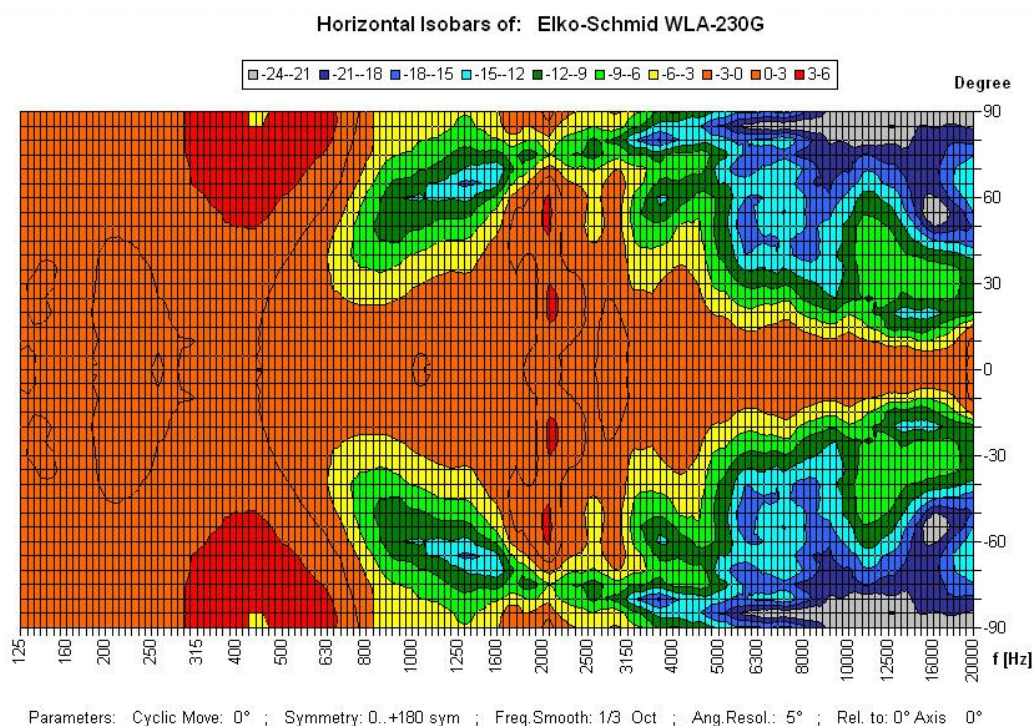

CE

1293

Elko Schmid GmbH & Co. KG
Glauchauer Str. 30, D-08058 Zwickau

10

DoP: 498058129314-OWS-PN-0014

EN 54-24

Loudspeaker for voice alarm systems for
fire detection and fire alarm systems for buildings

WLA-230G/EN5424

Intended Option:
Type A