

SPECIAL SOLUTIONS


Provision-ISR's special series aid the security professional facing the most unusual requests. The series includes discrete, c-mount, fisheye, Wireless, and PIR cameras, wireless adaptors, horn speakers, and a temperature testing unit.



FEI-360IPN

IR 6MP VANDAL-PROOF FISH-EYE CAMERA

Ideal for large open spaces, this 6MP Panoramic Fisheye Anti-Vandal camera can capture footage at a wide angle of 360°. The camera includes a built-in microphone, Digital WDR, BLC, HLC, and 3D-DNR for poor light conditions. Our Fisheye camera FEI-360IPN can do the work of multiple fixed focus lens cameras.



MAIN FEATURES

- 6MP
- 2160×2160 Resolution
- 360° panoramic field of view
- 3D-DNR




SPECIFICATIONS

Image Sensor	1/2.9" CMOS (3096 x 2196 - 16:9)
Effective Pixels	2160x2160 (1:1)
Electronic Shutter	1/25s ~ 1/100000s
Frame Rate	1-25/30FPS
Day & Night	ICR
Min. Illumination	Day: 0.1lux / Night: 0.068lux (@F2.0, AGC on) 0lux with IR on
Audio compression	G.711A/G.711U
Communication	2 Way Audio
Image Settings	AWB, AGC Adjustable, Exposure Mode (Auto) Sharpness, Saturation, Brightness & Contrast Adjustable
Image Enhancement	Digital WDR, BLC, HLC, ROI
Noise Reduction	3D-DNR
Image Orientation	Ceiling / Wall Installation
Privacy Zone	Yes
Motion Detection	Yes
Analytics	No
Video Compression	H.265 / H.264 / MJPEG (Substream only)
Resolution	5MP(2160x2160), 4MP(1920x1920), 2MP(1440x1440), 960x960, 480x480
Multi-Stream	Master Stream: 5MP(2160x2160), 4MP(1920x1920), 2MP(1440x1440) (1~30fps) Substream: 960x960, 480x480 (1~30fps) Third Stream: 960x960, 480x480 (1~30fps)
Bit rate	64Kbps ~ 5Mbps@H.265 / 64Kbps ~ 5Mbps@H.264
Encode Mode	VBR/CBR
Image Quality	Five levels under VBR; Free adjustment under CBR
IR Distance	15m (6 High Power Wide Angle IR LED)
Lens (Field of View)	1.07mm (360° for Ceiling Mount / 180° For Wall Mount)

SPECIFICATIONS

Iris	Fixed Iris
Lens Mount	M12 mount
Protection Rate	IK10
Bracket	No
Dimensions	Ø130mm×41mm
Weight (gross)	~605g
Network	RJ45 (+PoE)
Power	DC Socket
Analog Video Output	CVBS (BNCx1)
Audio Connectivity	Built-In Microphone + Audio Input + Audio Output
SD Card	Event/Schedule based Main/Substream recording (Up to 256GB)
Hard Reset Button	Yes
Alarm	Alarm in + Alarm out
Remote Monitoring	IE Browsing, Ossia VMS Software, Provision Cam2 Mobile App
User Access	Supports simultaneous monitoring of up to 10 users with multi-stream real-time transmission
Network Protocol	IPv4, IPv6, TCP, UDP, DHCP, NTP, DDNS, 802.1X, RTSP, Multicast, UPnP, Email, FTP, HTTPS, QoS
ONVIF	Yes
Ethernet	100Mbps
PoE	Yes
Power Supply	DC12V/~420mA / PoE/~5.4W
Work Environment	-30°C~60°C, 10%~90% Humidity
Junction Box	PR-B50JB

DIMENSIONS

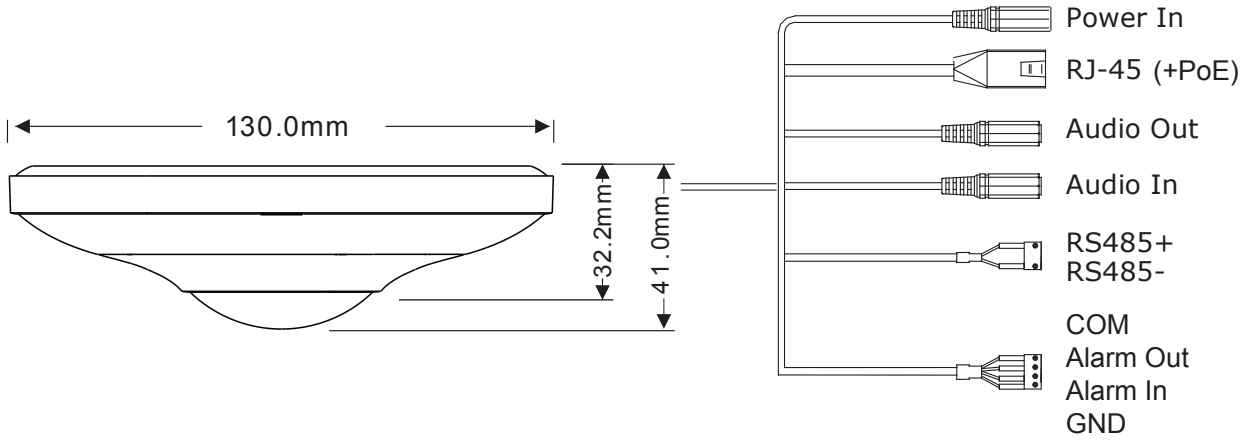

ACCESSORIES



PR-B50JB