


40M IR MVF LENS DOME CAMERA

DI-320IPE-MVF

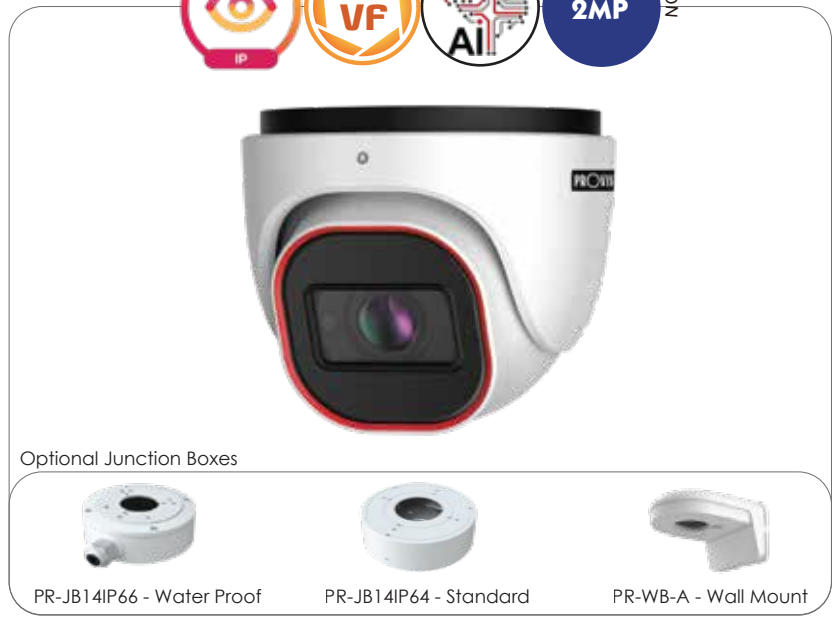

- | | | | |
|-------------------------------------|--------------------------------------|----------------------------|-----------------------|
| 1/2.9" CMOS Sensor | ONVIF | Built-in Microphone | IP 67 Protection |
| 2 Mega-Pixel | Digital WDR | Audio Input | Micro SD Card Support |
| True Day & Night (IR Cut Removable) | 3D Noise Reduction | 2.8-12mm Motorized VF Lens | |
| H.265 (HEVC) Compression | Motion Detection and Privacy Masking | 40m IR Illumination | |
| 0 Lux (IR On) Min. Illumination | Basic Analytics | PoE Support | |

Specifications

Camera	Video	Model	DI-320IPE-MVF
		Image Sensor	1/2.8" CMOS (16:9)
		Effective Pixels	1920x1080
		Electronic Shutter	1/25s ~ 1/100000s
		Frame Rate	1-25/30FPS
		Day & Night	ICR
		Min. Illumination	Day: 0.1lux / Night: 0.005lux (@F1.6, AGC On) 0lux with IR on
	Audio	Audio compression	G.711A/G.711U
		Communication	One-way Audio
	Image Processing	Image Settings	AWB, AGC Adjustable, Exposure Mode (Auto) Sharpness, Saturation, Brightness & Contrast Adjustable
		Image Enhancement	True WDR (120dB), BLC, HLC, ROI
		Noise Reduction	3D-DNR
		Image Orientation	Mirror/Flip
		Privacy Zone	Yes
		Motion Detection	Yes
Compression	Analytics	Object Detection (Sterile Area, Line Crossing, Object Counting), Face Detection (10 Faces per frame), Camera Tampering	
	Video Compression	H.265S/H.264S*, H.265+/H.264+/H.265/H.264/MJPEG**	
	Resolution	2MP / 1MP / D1 (704x576) / QVGA (480x240) / CIF (352x288)	
	Multi-Stream	Master Stream: 2MP (1920x1080) / 1MP (1280x720) (1~30fps) Sub-Stream: 1MP/QVGA/D1/CIF	
	Bit rate	64Kbps ~ 4Mbps@H.265 / 64Kbps ~ 6Mbps@H.264	
	Encode Mode	VBR/CBR	
	Image Quality	Five levels under VBR; Free adjustment under CBR	

Housing	IR Distance	40m (3 High Power IR LED)
	Lens (Field of View)	2.8-12mm MVF with Auto Focus (103°-32°)
	Iris	DC Iris
	Lens Mount	Ø14 Mount
	Protection Rate	Water Proof: IP67
Connectivity	Bracket	3-Axis Bracket
	Dimensions	Ø113mm×99.6mm
	Weight(gross)	~640g
	Network	RJ45 (+PoE)
	Power	DC Socket
	Analog Video Output	No
	Audio Connectivity	Built-In Microphone + Audio Input
Network	SD Card	Event/Schedule based Main/Sub-Stream recording (Up to 128Gb)
	Hard Reset Button	Yes
	Alarm	No
	Remote Monitoring	IE Browsing, CMS Software, Provision Cam2 Mobile App
	User Access	Supports simultaneous monitoring for up to 10 users with multi-stream real time transmission
Others	Network Protocol	IPv4, IPv6, TCP, UDP, DHCP, NTP, DDNS, 802.1X, RTSP, Multicast, UPnP, Email, FTP, HTTPS, QoS, P2P
	ONVIF	Yes
	Ethernet	100Mbps
Others	PoE	Yes
	Power Supply	DC12V/~900mA / PoE/~10W
	Work Environment	-30°C~60°C, 10%~90% Humidity

*Main Stream Only, **Sub-Streams Only

