


## DS-1268ZJ

Pendent Mounting Bracket for Dome Camera

### Features:

- Aluminum alloy material with surface spray treatment
- Design with cable entry hole

### Dimension:

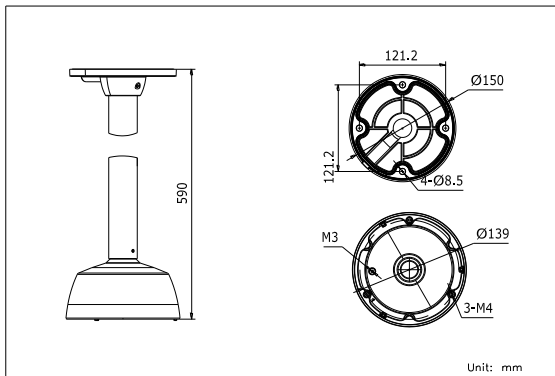

### Order Model:

DS-1268ZJ

### Parameter:

Model	DS-1268ZJ
Parameters	Pendent Mounting Bracket for Dome Camera
Appearance	Hikvision White
Range of Application	Suitable for dome camera pendent mounting
Material	Aluminum Alloy
Dimension	Φ 139 × 590mm
Weight	2200g



### Notice:




- The bracket is for dome camera
- Pay attention to color matching
- The bracket should be installed on flat wall
- The wall must be capable of supporting over 3 times as much as the total weight of the camera and the mount.
- The maximum load capacity of the bracket is 4.5KG

### Model Suitable:


DS-2CD72XXF-E(I)Z(H)(S), DS-2CD72X3PF-E(I)Z(H)(S), DS-2CD72X3NF-E(I)Z(H)(S), DS-2CD7293PFW-D-E(I)Z(H)(S), DS-2CD7293NFW-D-E(I)Z(H)(S), DS-2CD72X4FWD-E(I)Z(H)(S), DS-2CD4312F(WD)-(I)Z(H)(S), DS-2CD4324F-(I)Z(H)(S), DS-2CD4332FWD-(I)Z(H)(S)

### Installation Step:


- ① Choose the appropriate wall to fix base, pole and cap; complete wiring
- ② Complete installation and screw up
- ③ Take off lower dome and unscrew the zoom module




- ⑤ Wiring and fix zoom module to adaptor and adjust the angle of view



- ⑥ Unscrew the zoom module and fix the lower dome



- ⑦ Installation Complete



**Note:** The actual bracket may vary from the picture above.