



Installer Friendly Manual Call Point

DM 700 Series

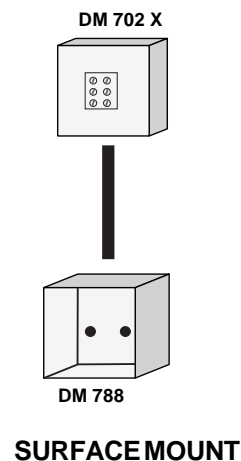

- Easy to install
- With or without series resistor
- With or without LED
- With breakglass or resettable
- Easy to replace glass
- Surface and flush mounting options
- High quality micro switch
- Glass protected with foil
- Complies with BS 5839 p. 2
- Operates after long period of disuse
- Standard flame symbol
- Preformed mounting slots
- Standard accepts hinged cover
- Key test facility
- Named glass (option)

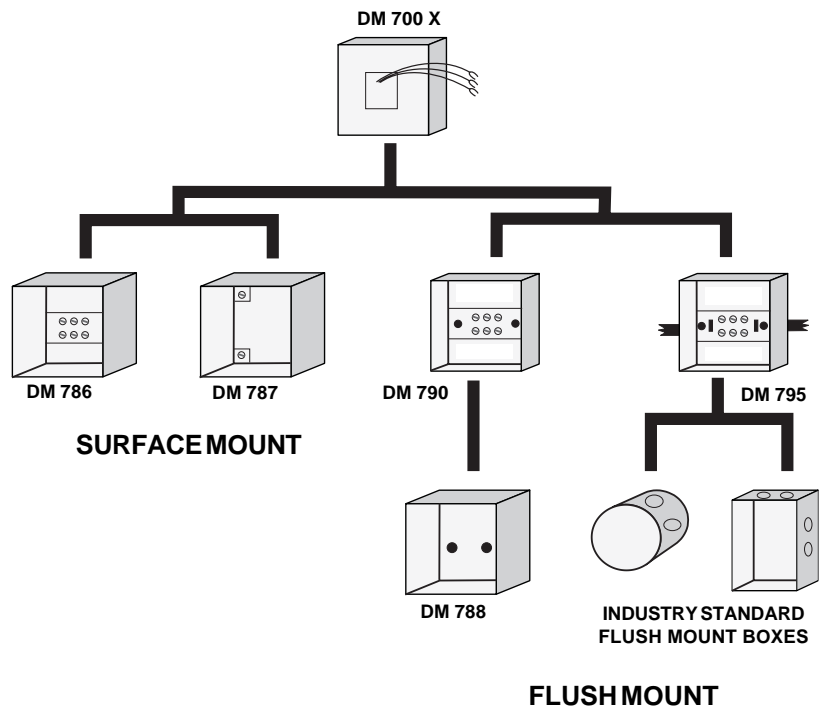

How to order

Model	Description
DM 700	Manual callpoint (MCP), flying leads
DM 700B	As DM 700, blue
DM 700G	As DM 700, green
DM 700Y	As DM 700, yellow
DM 700K	MCP with keyswitch, flying leads
DM 700KB	As DM 700K, blue
DM 700L	As DM 700, 470 Ohm seriesresistor & LED
DM 700LB	As DM 700L, blue
DM 700R	As DM 700 with 470 Ohmseriesresistor
DM 700RB	As DM 700R, blue
DM 702	MCP with connectors
DM 702R	As DM 702 with 470 Ohmseriesresistor
DM 702Y	As DM 702, yellow
DM 786	Installer friendly surface mount box with connectors
DM 787	Surface mounting box with connectors
DM 787B	As DM 787, blue
DM 787G	As DM 787, green
DM 787Y	As DM 787, yellow
DM 788	Surface mount box without connectors
DM 788B	As DM 788, blue
DM 788Y	As DM 788, yellow
DM 790	Flush mount cradle with connectors
DM 795	Flush mount cradle, connectors & fork grips
DM 700E	Surface mount MCP IP67, including backbox
DM 782	Hinged cover
DM 783	BZB black bezel
DM 784	Test key
DM 785	Spacer box red
DM 710	Glass, English
DM 718	Glass, English/Polish
DM 720	Glass, Dutch
DM 730	Glass, Belgium
DM 740	Glass, German
DM 750	Glass, French
DM 760	Glass, Italian
DM 770	Glass, Spanish
DM 775	Glass, Portuguese
DM 776	Glass, Greek
DM 777	Glass, Hungarian
DM 781	GS card
DM 800	Resettable element for DM 700 Series

* Contact sales office for labeling/colours.

Technical data

Material	Self-extinguishing Noryl SE 100
Max. contact rate resistive load:	
50 V ac or 30 V dc	8.0 A
50 V dc	3.0 A
Contact resistance	Max. 50 milliohms
Series resistor	470 Ohm
Standard colour	Red - RAL N° 3020
Ambient temperature range	-40° to + 85° C
Maximum relative humidity	90% RV



The DM 700 series complies with the essential requirements of the EMC directive 89/336/EMC.

SLC Technologies Europe & Africa
Headquarters
Excelsiorlaan 28
B-1930 Zaventem
Tel. : ++ 32 2 725 11 20
Fax : ++ 32 2 721 40 47