


# HD ANALOG IR DOME CAMERA VARI-FOCAL LENS

DI-390AHDU-MVF




MODEL	DI-390AHDU-MVF+
Image Sensor	1/3" 2MP Sensor
Effective Pixels	1984(H)×1105(V)
Scanning System	Progressive
Resolution	Digital:1920x1080 + Analog:960H*
Min. Illumination	0.1Lux
Day & Night	True Day&Night (ICR)
IR LED	3 LED Array (25m)
OSD Menu	Available
CoC Support	Yes
Day & Night Mode	EXT, Color, B&W, Auto
Backlight Compensation	Off/BLC/HLC/True WDR** (Digital Output Only)
S/N Ratio	≥60dB (AGC Off)
White Balance	Auto, Manual, Auto-Push
Noise Reduce	3D-DNR For AHD / CVI / TVI, 2D-DNR For CVBS*
Video Output	AHD / CVI / TVI (Selectable by the OSD Controller) + CVBS (While WDR off)
Defog	Off/On
Privacy Mask	On/Off (4 Areas)
Motion Detection	On/Off (4 Areas)
D-Effect	Freeze, Mirror, Negative Image
Lens	2.8-12mm Motorized with Auto-Focus
Power	DC12V±10%, ~400mA
Operation Temp.	-30°C~+50°C
Waterproof	IP66
Dimension	129.5*90*119mm
Net weight	476g

## Main Features:

- Sensor: 1/3", 2 Mega-Pixel
- Dual Video Output: 1080P AHD / CVI / TVI + Analog\*
- Lens: 2.8-12mm Motorized with Auto Focus
- True Day & Night – ICR
- True WDR\*\* (Digital Output Only)
- IR Range: 25m (3 Array LED)
- IP66
- CoC Support
- Weight: 476g
- Power: DC 12V, ~400mA

\*Analog video output is not available while WDR is on.  
\*\*WDR works at 12/15FPS

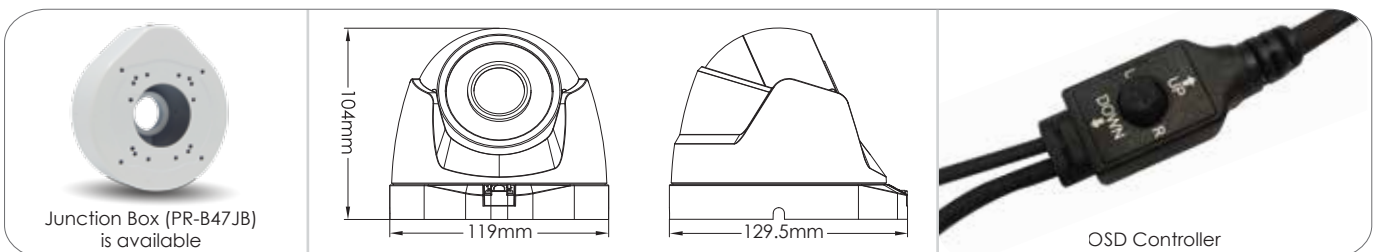

Junction Box (PR-B47JB) is available

OSD Controller